
SPECIFICATIONS 产品数据

硅岩板
SILICON CRYSTAL PANEL

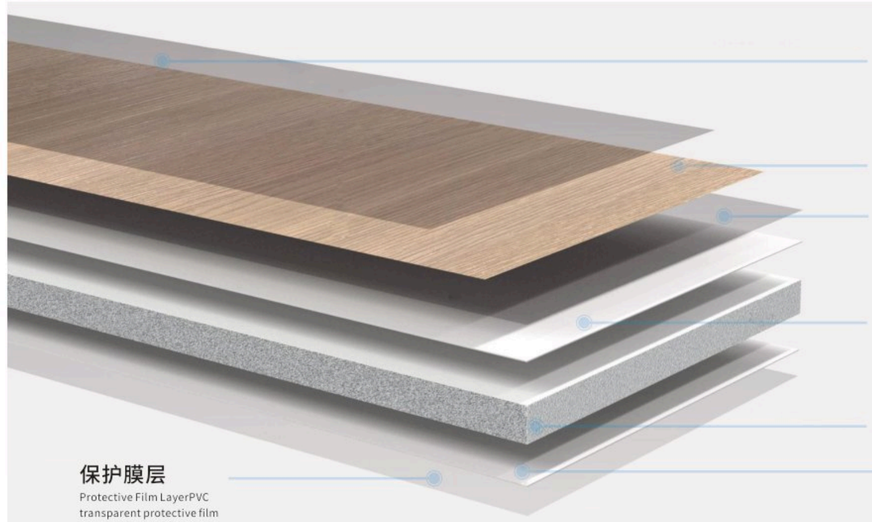

名称 Name	硅岩板 Silicon crystal panel
结构 Structure	基材、加强固化层、装饰层、保护层 Base Material, Reinforcement Curing Layer, Decorative Layer, Protective Layer
基材 Base materials	硅藻泥、竹粉、木粉、碳粉、PVC粉、以及天然树脂等材料，200多度高温热加工融合而成 Made from materials such as diatomaceous earth, bamboo powder, wood powder, carbon powder, PVC powder, and natural resins, fused together throughhigh-tempera ture processing of over 200 degrees Celsius
装饰层 Decorative Layer	木纹、布纹、皮纹、石纹、纯色、肤感、真漆、金属，使用PUR热胶覆膜 Decorative Layer: Designs include wood grain, fabric texture, leather texture, stonetexture, solid colors, tactile feel, real lacquer, and metal. Laminating with PUR hot glue.
加强固化层 Reinforcement Curing Laye	可塑性好、不易变形，防止运输途中磨损装饰层 Good plasticity and not easily deformed.Prevents wear and tear on the decorativelayer during transportation

产品特点
PRODUCT CHARACTERISTICS

防水防潮:出色的防水和防潮性能，即使在湿润的环境中也能保持其原始状态，避免潮湿和霉菌的侵害，
Waterproofand Moisture-proof: Excellent water proof and moisture-proof performance ensures that it maintains itoriginal state even in humid environments, preventingdamage from moisture and mold.

防火阻燃:B级阻燃材料，适用于防火较高场所，为您提供更高的安全保障。
Fireproofand Flame-retardant: Class B flame-retardantmaterial suitable for places with high fire safety requirements, offering you enhanced safety protection.

超强柔韧性:可根据需要任意弯曲、折弯和切割，满足不同装饰设计的要求。
Exceptional Flexibility: Can be bent, folded, and cutaccording to specific needs, catering to variousdecorative design requirements.

表面具有高度的抗刮和耐磨性，长时间使用后仍能保持如新的外观。
Scratch-resistant and Durable: The surface boasts high scratch resistance and durability, maintaining a freshappearance even after prolonged use.


高密度基材 防撞抗压 持久不变形不怕撞击 耐用30年
High density substrates are resistant to collision, compression, lasting, deformation, impact and durability for 30 years.

饰面多样:提供多种饰面选择，满足不同装饰风格和个人喜好。
Diverse Finishes: Offers a variety of finishing options to meet different decorative styles and personalpreferences.

安装方便:安装过程简单快捷，无需复杂的工具或技能，节省您的时间和精力。
Easy nstallation: The installaticn process is straightforwarc and efficient, saving yo.. time and effort without heneed for complicated tools or skil s.

应用范围适用于家居、商业空间、公共区域等多种场合都能展现出卓越的装饰效果和功能性。
Versatile Applizations: Sjitabe fo various settings including homes, commcrcial spaces, and public arcas, shcwcasingwulslandiny deculative effecls and funcliunalily.

Advanced Customization

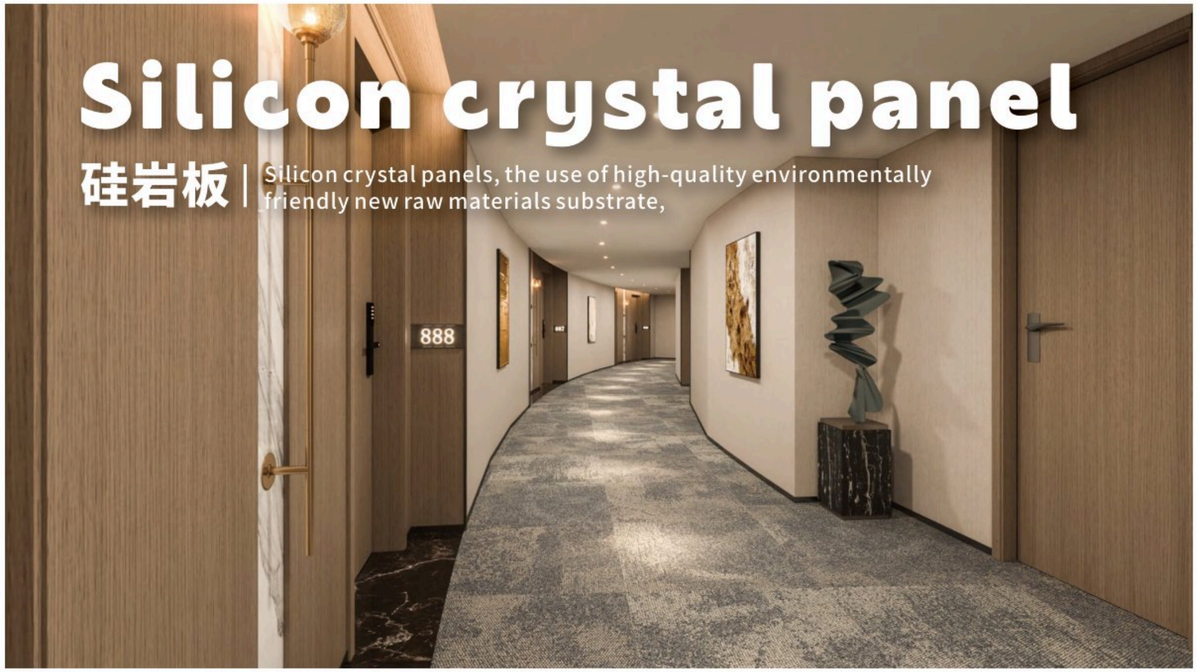

硅岩板面板概述
SILICON CRYSTAL PANE PANELS OVERVIEW

硅晶板材料面板，采用优质环保的新原料基材，通过高温工艺挤压而成，专业的生产设备技术，全过程无任何污染材料，无尘车间批量生产。我们能够提供多种表面覆膜工艺，多类型膜皮，PVC，PET等具有高强度防刮耐磨功能，金刚板，其硬度也是非常高强并且原材料把控材料能够批量个性定制生产，可以满足不同客户的需求。

Silicon crystal panels, the use of high-quality environmentallyf riendly new raw materials substrate, extruded through high-temperature process, professional production equipment technology, the whole process without any pollution materials dust-free workshop mass production. We are able to provide a variety of surface coating process, multi-type film skin, PVC, PET, etc., with high-strength anti-scratch wear-resistant function diamond panels , its hardness is also very high strength, and raw materials to control the material to be able to batch personalised custom production, can meet the needs of different customers.

知名品牌认证
Well-known brand certification.

绿色建材
Green building materials.

国家免检产品
China inspection-free products.


ISO认证
ISO certification.

欧盟CE认证
EU CE CertificationK



SPECIFICATIONS 产品数据

碳晶板
CARBON CRYSTAL PANEL

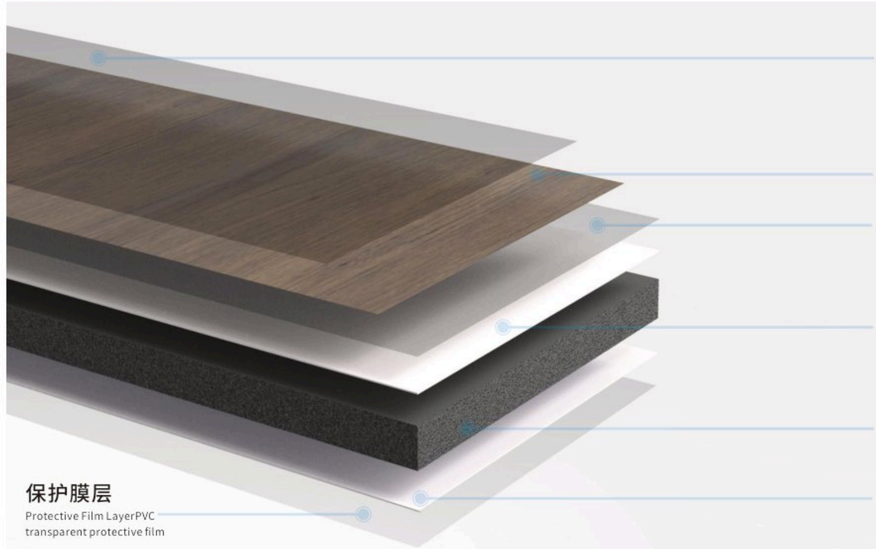

名称 Name	碳晶板 Carbon Crystal Panel
结构 Structure	基材、加强固化层、装饰层、保护层 Base Material, Reinforcement Curing Layer, Decorative Layer, Protective Layer
基材 Base materials	竹粉、木粉、碳粉、PVC粉、以及天然树脂等材料，200多度高温热加工融合而成 Made from materials such as , bamboo powder, wood powder, carbon powder, PVC powder, and natural resins, fused together throughhigh-tempera ture processing of over 200 degrees Celsius
装饰层 Decorative Layer	木纹、布纹、皮纹、石纹、纯色、肤感、真漆、金属，使用PUR热胶覆膜 Decorative Layer: Designs include wood grain, fabric texture, leather texture, stonetexture, solid colors, tactile feel, real lacquer, and metal. Laminating with PUR hot glue.
加强固化层 Reinforcement Curing Laye	可塑性好、不易变形，防止运输途中磨损装饰层 Good plasticity and not easily deformed.Prevents wear and tear on the decorativelayer during transportation

产品特点
PRODUCT CHARACTERISTICS

防水防潮:出色的防水和防潮性能，即使在湿润的环境中也能保持其原始状态，避免潮湿和霉菌的侵害，
Waterproofand Moisture-proof: Excellent water proof and moisture-proof performance ensures that it maintains itoriginal state even in humid environments, preventingdamage from moisture and mold.

防火阻燃:B级阻燃材料，适用于防火较高场所，为您提供更高的安全保障。
Fireproofand Flame-retardant: Class B flame-retardantmaterial suitable for places with high fire safety requirements, offering you enhanced safety protection.

超强柔韧性:可根据需要任意弯曲、折弯和切割，满足不同装饰设计的要求。
Exceptional Flexibility: Can be bent, folded, and cutaccording to specific needs, catering to variousdecorative design requirements.

表面具有高度的抗刮和耐磨性，长时间使用后仍能保持如新的外观。
Scratch-resistant and Durable: The surface boasts high scratch resistance and durability, maintaining a freshappearance even after prolonged use.

高密度基材 防撞抗压 持久不变形不怕撞击 耐用30年
High density substrates are resistant to collision, compression, lasting, deformation, impact and durability for 30 years.

饰面多样:提供多种饰面选择，满足不同装饰风格和个人喜好。
Diverse Finishes: Offers a variety of finishing options to meet different decorative styles and personalpreferences.

安装方便:安装过程简单快捷，无需复杂的工具或技能，节省您的时间和精力。
Easy nstallation: The installaticn process is straightforwarc and efficient, saving yo.. time and effort without heneed for complicated tools or skil s.

应用范围适用于家居、商业空间、公共区域等多种场合都能展现出卓越的装饰效果和功能性。
Versatile Applizations: Sjitabe fo various settings including homes, commcrcial spaces, and public arcas, shcwcasingwulslandiny deculative effecls and funcliunalily.

Advanced Customization



碳晶板面板概述
CARBON CRYSTAL PANELS OVERVIEW

碳晶板材料面板，采用优质环保的新原料基材，通过高温工艺挤压而成，专业的生产设备技术，全过程无任何污染材料，无尘车间批量生产。我们能够提供多种表面覆膜工艺，多类型膜皮，PVC，PET等具有高强度防刮耐磨功能，金刚板，其硬度也是非常高强并且原材料把控材料能够批量个性定制生产，可以满足不同客户的需求。

Carbon Crystal panels, the use of high-quality environmentallyf riendly new raw materials substrate, extruded through high-temperature process, professional production equipment technology, the whole process without any pollution materials dust-free workshop mass production. We are able to provide a variety of surface coating process, multi-type film skin, PVC, PET, etc., with high-strength anti-scratch wear-resistant function diamond panels , its hardness is also very high strength, and raw materials to control the material to be able to batch personalised custom production, can meet the needs of different customers.

知名品牌认证
Well-known brand certification.

绿色建材
Green building materials.


国家免检产品
China inspection-free products.

ISO认证
ISO certification.

欧盟CE认证
EU CE CertificationK




性能实拍
Performance

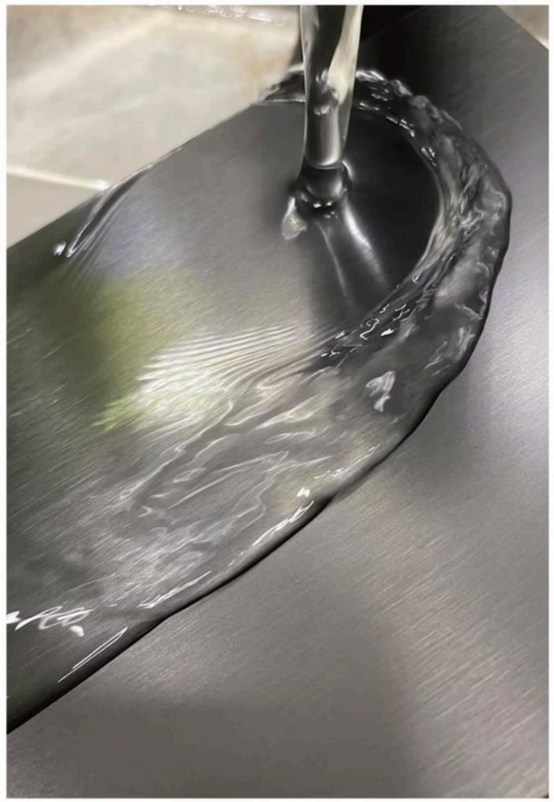



防水防火： 不会因为受潮而发霉，经久耐用，用不变形
Waterproof and fireproof, it will not become moldy due to moisture, is durable and will not deform after use.



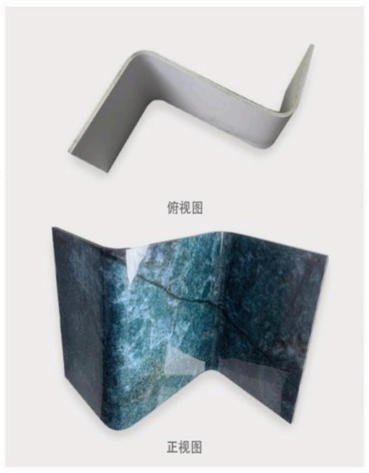



折弯塑性： 硬而不脆方为韧，可折弯360°，轻松拿实现各种造型
Can be bent easy to hold and realize various shapes.

Advanced Customization

拼接槽位
Splicing Slot



U型槽　U-SPLICING PROCESS



平型槽　FLAT SEAM SPLICINGPROCESS



大V槽　BIG V SLOTSPLICING MODE



锁扣　LOCKING SPLICING MODE



土字槽　土SPLICING MODE



金属工字链接　Meta LINK




Silicon rock panel

矽岩板 | Silicon rock panel, using high-quality environmentally friendly new raw materials substrate

SPECIFICATIONS 产品数据

矽岩墙板
SILICON ROCK PANEL

Advanced Customization

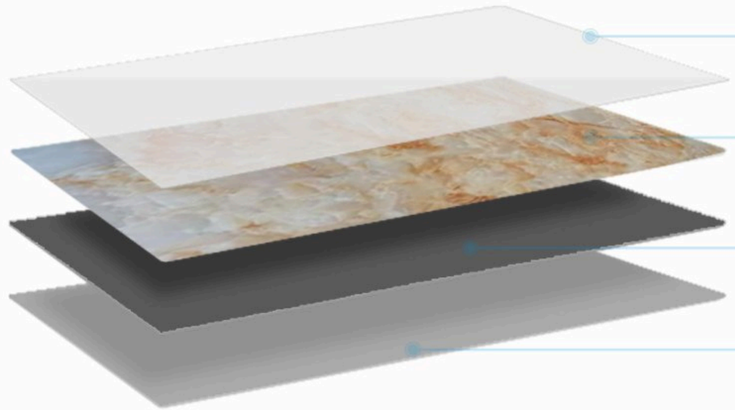

抗紫外线涂层
UV resistantcoating layer

Pvc膜纸层
PVC film paper layer

石塑层
SPC layer

结构保护层
Structural protective layer

矽岩墙板与传统材料的优劣对比
Comparison of advantages and disadvantages between Silicon rock panel and traditional materials

墙板类型 Wallpanel Typials	优点 Wallpanel Typials	缺点 Wallpanel Typials
瓷砖 Ceramic tile	颜色多样化，不易损坏，易维护，成本较低。 The color is diversified, not easy to damage, easy to maintain and low cost.	难以切割和造型。自重大，易脱落，遇潮湿表面水分多。导热性差，翻新改造时铺设困难。 It is difficult to cut and shape. High self-weight, easy to fall off, and more moisture on the wet surface. The thermal conductivity is poor, and it is difficult to lay during renovation.
传统石塑墙板 SPC wallpanel	石粉和pvc材料，高温聚合而成。防火防潮防白蚁，是室内装修的材料。 Stone powder and pvc material, polymerized at high temperature. Fireproof, moisture-proof and termite-proof, is the material of interior decoration.	表面强度差，不抗污，不抗划伤，容易损坏。彩膜使用胶水粘合，含甲醛，含重金属。 The surface strength is poor, not anti-stain, not resistant to scratches, easy to damage. The color film is bonded with glue, including formaldehyde and heavy metals.
矽岩墙板 Silicon rock pane	超博环保、抗毒防菌、易裁切、密度强韧、防水防潮、防火阻燃、吸音防噪、美观时尚、省时快装、保养简单。 Super environmental protection, anti-virus and anti-bacteria, easy to cut, strong density,Waterproof and moistureproof, fireproof and flame retardant, sound absorbing and noise proof, beautiful and fashionable, Time-saving fast loading and simple maintenance.	产品生产工艺要求高。产品安装工序严格、 The production process of the product is highly demanding,The product installation procedure is strict.

尺寸灵活 RARE DESION

矽岩墙板1220×2400，1220×2750作为标准尺寸。事实上，它可以为项目量身定制，为墙板在使用中提供了极大的灵活性和自由度。一方面，极大的减少了设计单元的中断次数，连纹效果也使空间更富整体性;另一方面，保证了不同项目空间高度所要求的通用性。

坚韧更轻薄 RARE DESIGN


硅密墙板的厚度仅有有1.2mm/1.7mm/2.0mm/2.5mm/3.0mm/4.0ｍｍ厚，保证了所有应用空间对重量和强度的要求。矽岩墙板测量更轻、性能更加优异，可有效降低施工损耗，搬运更轻松，安装更便捷，性价比更高。

满足多空间应用 RARE DESIGN


矽岩墙板解决了传统材料在装修中的痛点，我们提供的整体空间解决方案受到众多佳宅、商业、酒店、教育、康养，公共项目的认可和喜爱，为其带来卓越的空间享受

Metal Line 金属线


Advanced Customization

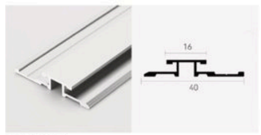


BH8270
内嵌工字

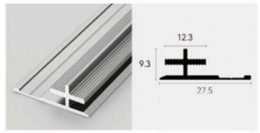


BH8301
土字链接




BH8390
工字灯带




BH8152
L型线




BH8215
收口线




BH8216
工字线




BH8213
工字线




BH8456
错层灯带




BH8455
内嵌踢脚线




BH8456
错层灯带




BH8660
发光踢脚线




B BH8240
L L10X10直角



BH8240
L10X10直角




BH8215
收口线




BH8330
平面踢脚线

整根长度3米/条，适用墙板厚度5、6、8、9mm，产品颜色哑白色、哑黑色、哑古铜、哑银色、星空灰、玫瑰金

The whole length is 3 meters per strip, suitable for wallboard thickness 5, 6, 8, 9mm, product color dumb white, mute black, dumb bronze, dumb silver, star gray, rose gold

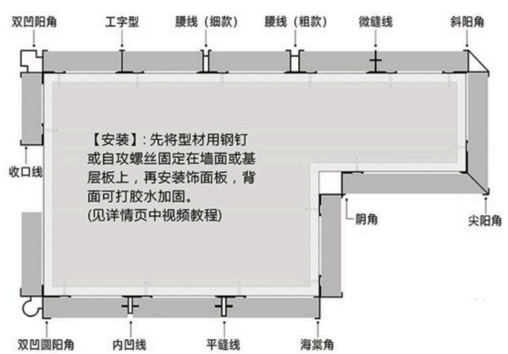

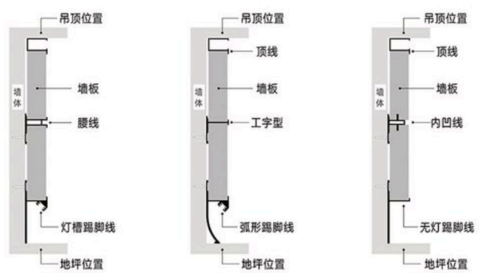

注意事项：安装过程中，铝型材表面避免接触腐蚀性的物质
例如：油漆稀释剂、酸性玻璃胶、水泥等。




DESIGN CONCEPT

Our design incorporates same-color carbon crystal boards, same-color wood grain grilles, and metal lines for a consistent color scheme and modern ambiance. Special light strip slots enhance the atmosphere with gentle lighting. Additionally, skin-feel series carbon crystal boards and Pet continuous texture materials offer durability, aesthetics, and a pleasant tactile experience, showcasing unique visual effects.

设计理念

这个设计案例涵盖了同色碳晶板、同色木纹格栅以及金属线等配件，确保了整体色调的一致性，为空间营造出现代感和统一的氛围。特别设计的灯带槽位则为空间增添了柔和的光线，打造出温馨舒适的氛围。除此之外，我们还采用了肤感系列碳晶板和Pet连纹等材料，不仅在美观和耐用方面表现出色，更能为用户带来愉悦的触感体验，并展现出细腻的质感和独特的视觉效果。

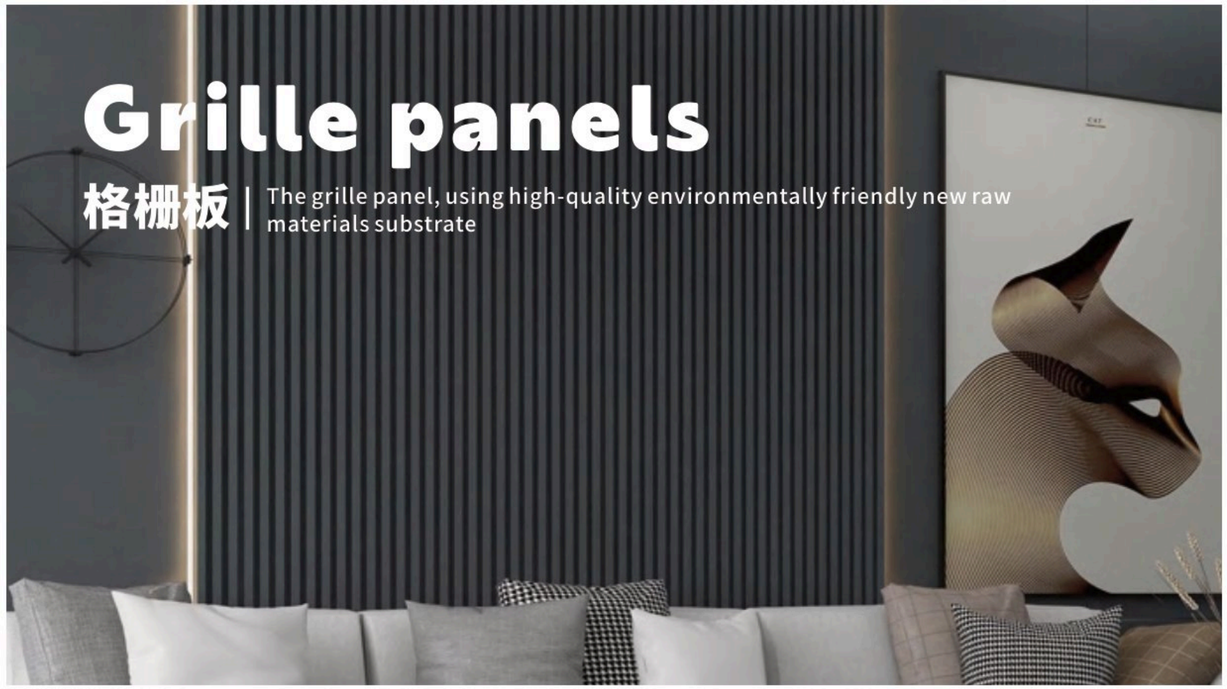


Grille panels

格栅板 | The grille panel, using high-quality environmentally friendly new raw materials substrate


格栅板概述
GRILLE PANE PANELS OVERVIEW

格栅板面板，采用优质环保的新原料基材，通过高温工艺挤压而成专业的生产设备技术，全过程无任何污染材料，无尘车间批量生产。我们有不同类型结构的格栅材料，能按照客户需求做到同颜色同纹路我们能够提供多种格栅工装和家装材料表面覆膜工艺，多类型膜皮，PVCPET等，具有高强度防刮耐磨功能，有配套完善的线条、灯光材料满足多样化设计，并且原材料把控能够批量个性定制生产可以满足不同客户的需求。


The Grille panel, using high-quality environmentally friendly new raw materials substrate, extruded through high temperature process, professional production equipment technology, the whole process without any pollutingmaterials, dust-free workshop mass production. We have different types ofstructural louver materials, according to customer demand to do the samecolour with the pattern, we can provide a variety of louver industrial andhome decoration materials surface coating process, multi-type film skin,PVC,PET, etc., with high-strength anti-scratch wear-resistant function,there is a perfect supporting lines, lighting materials to meet the diversifieddesign, and the control of raw materials can be a batch of personalized custom production to meet the different needs of customers. Customerscan meet different needs.

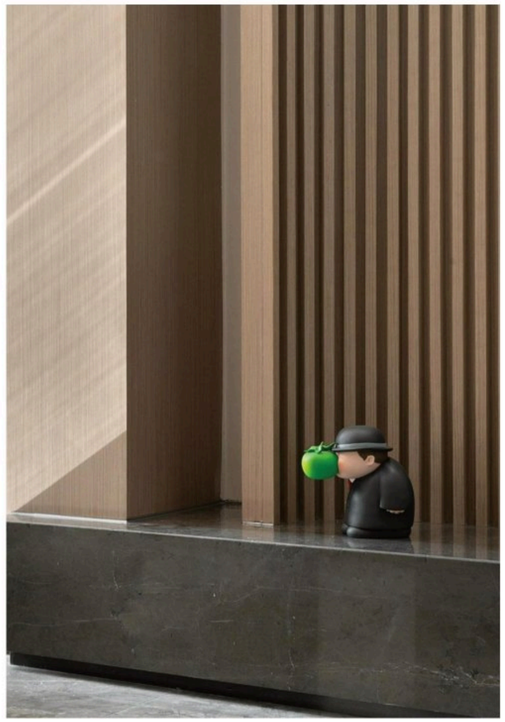


Advanced Customization

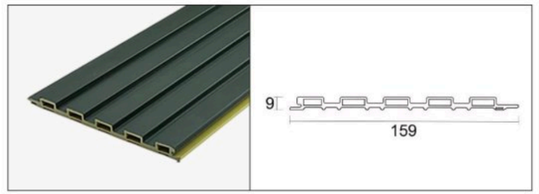


Type:GS1589 Size:2440*159*9

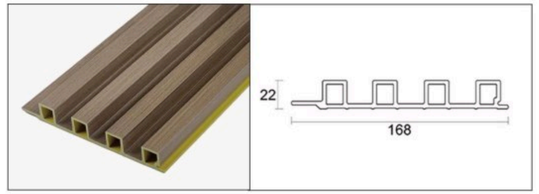


Type:GS16822 Size:2440*168*22

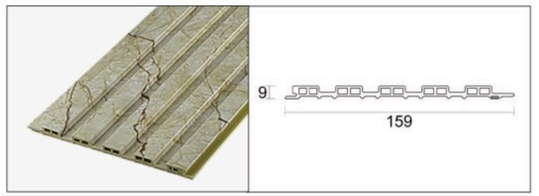


Type:Gs1599 Size:3000*159*9

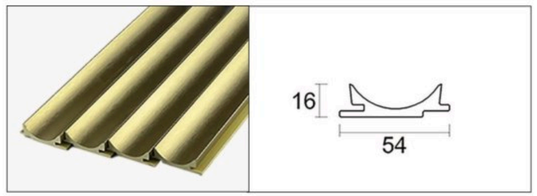


Type:C55515 Size:2750*54*16

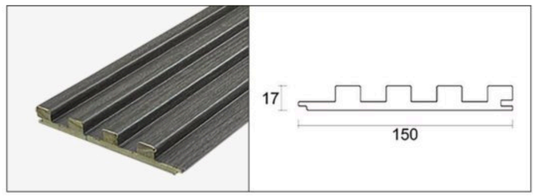


Type:GS15017 Size:2750*150*17

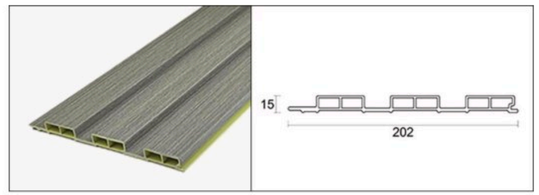

Type:GS20415 Size:2440*202*15

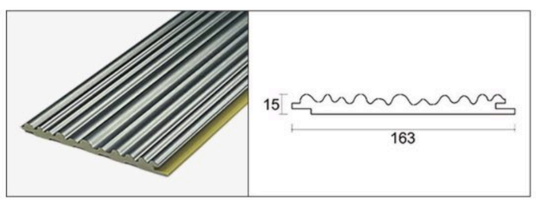


Type:GSL8312 Size:2750*163*12

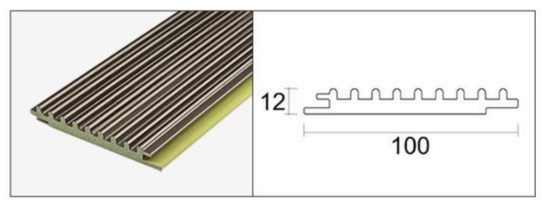


Type:GS10212 Size:2440*100*12


Advanced Customization

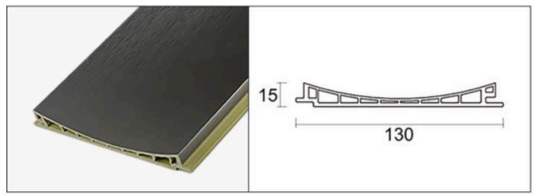


Type:GS13015 Size:2750*163*12

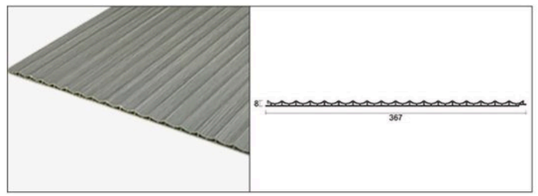


Type:GS3698 Size:2750*360*8

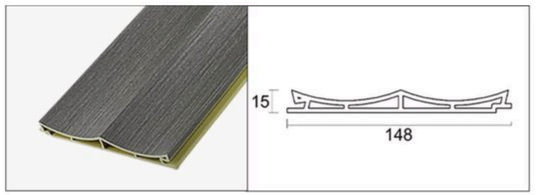


Type:GS14815 Size:2750*148*15

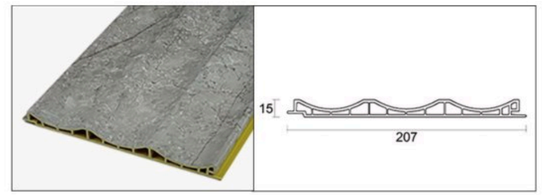


Type:GS20715 Size:3000*42*15.5

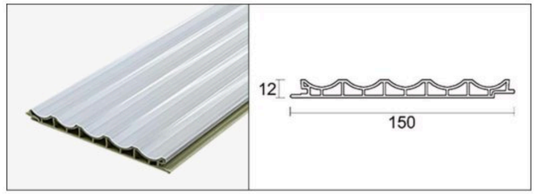


Type:GS15012 Size:2750*150*12

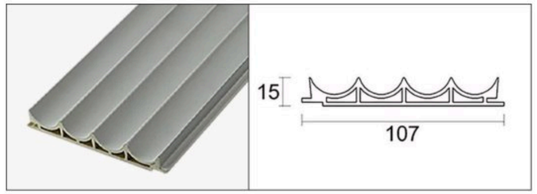


Type:GS10919 Size:2750*107*16

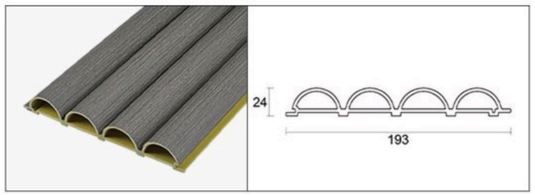


Type:GS19325 Size:2750*193*24

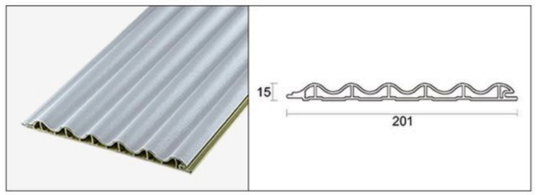

Type:GS20115 Size:2750*201*15

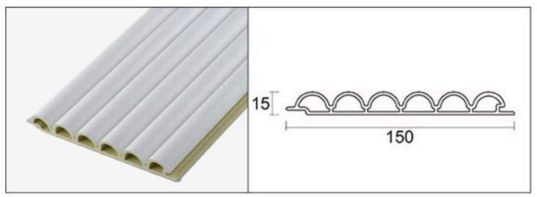

Type:GS13518 Size:2750*150*15

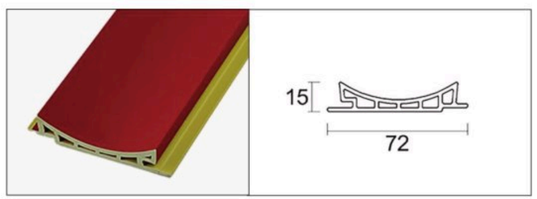

Type:GS7315 Size:2750*72*15






空间扩容、格调贵气、大尺寸不受限

SPACE EXPANSION, GHOSTLY STYLE UNRESTRICTED LARGE FIELD OF MSION


FB92306B

规格(Specification)：2800mm*600/200mm*8mm

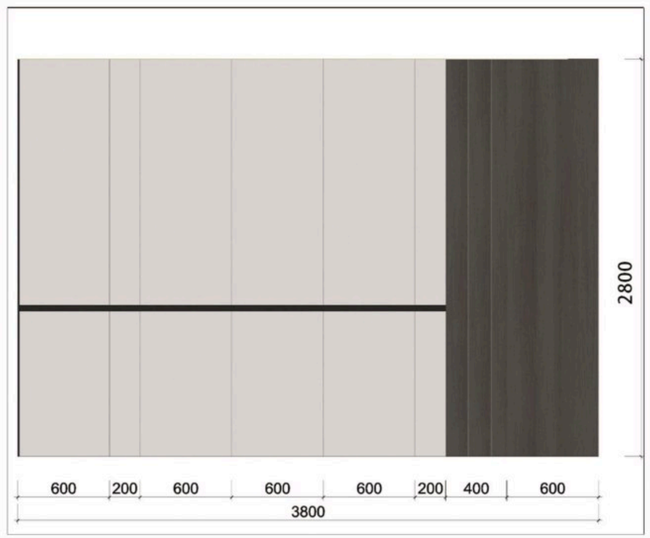

产品结构

Product structure

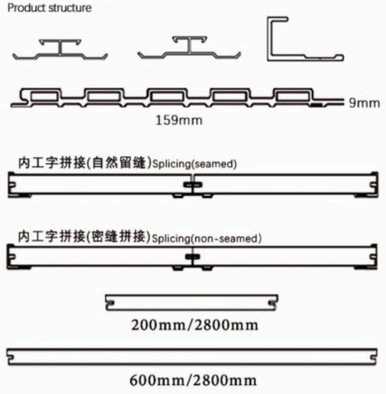






空间扩容、格调贵气、大尺寸不受限

SPACE EXPANSION, GHOSTLY STYLE UNRESTRICTED LARGE FIELD OF MSION


FB92311A

规格(Specification)：2800mm*600/200mm*8mm

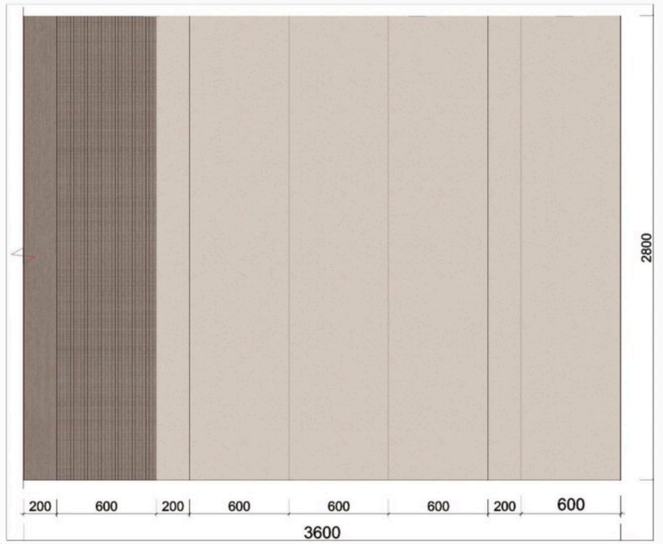


产品结构

Product structure

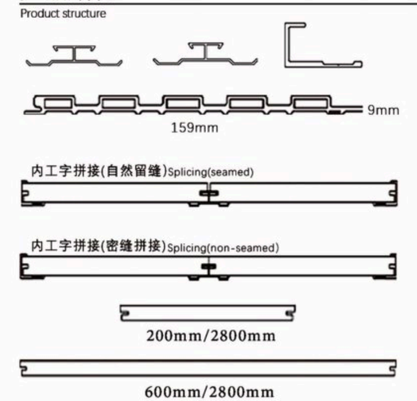



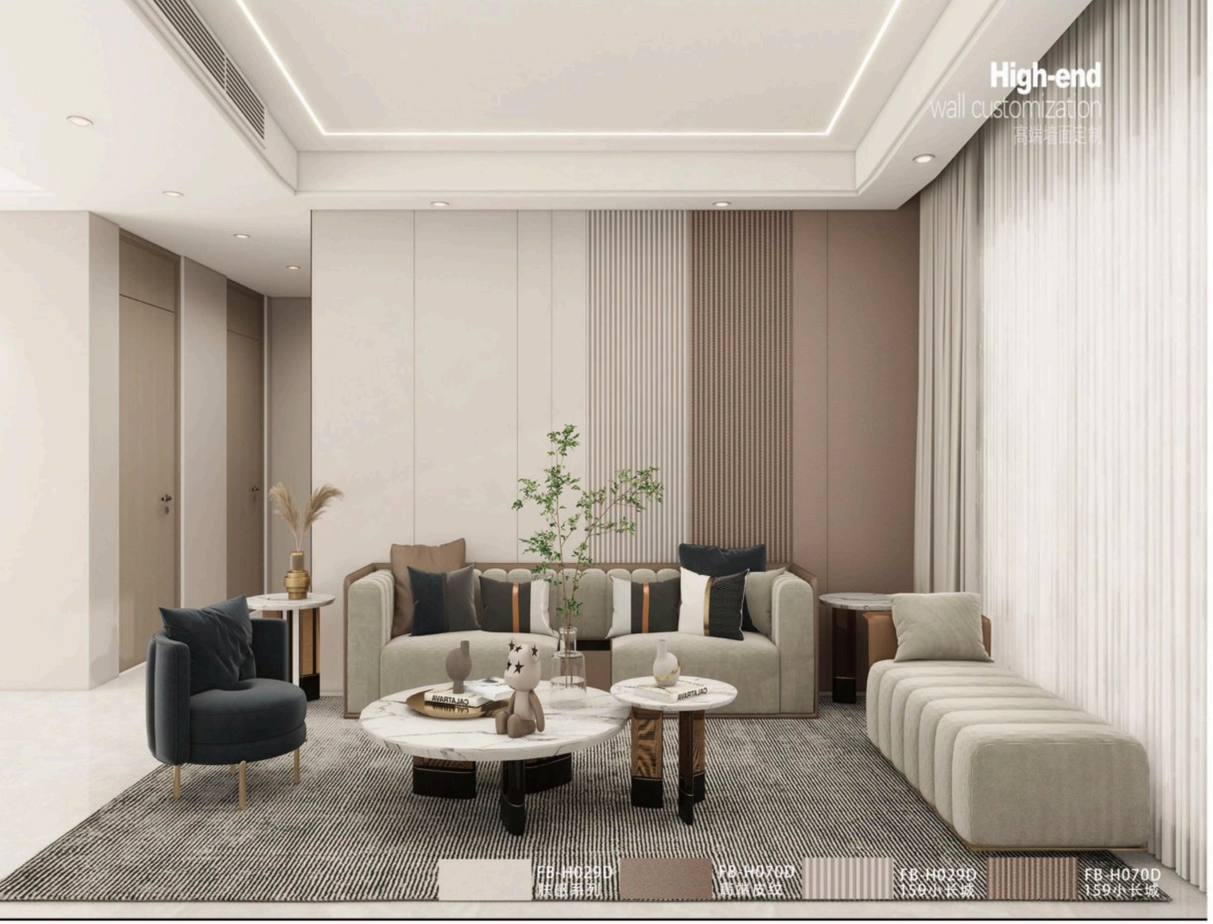


空间扩容、格调贵气、大尺寸不受限

SPACE EXPANSION, GHOSTLY STYLE UNRESTRICTED LARGE FIELD OF MSION


FB92305B

规格(Specification)：2800mm*600/200mm*8mm

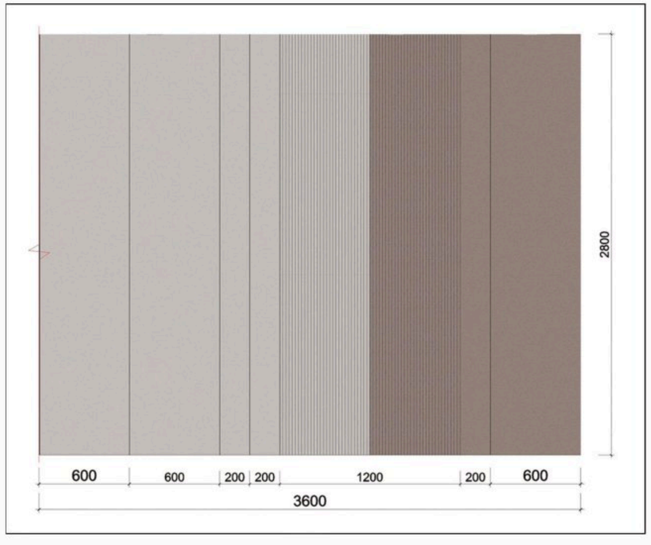

产品结构

Product structure

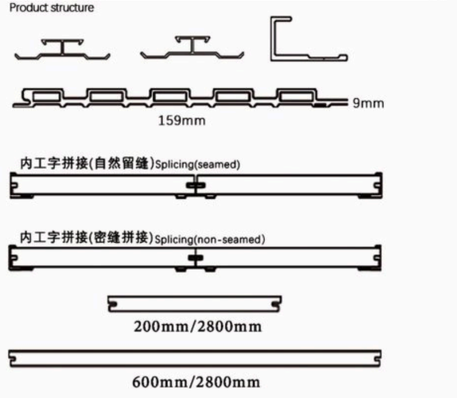






空间扩容、格调贵气、大尺寸不受限

SPACE EXPANSION, GHOSTLY STYLE UNRESTRICTED LARGE FIELD OF MSION


FB92309B

规格(Specification)：2800mm*600/200mm*8mm

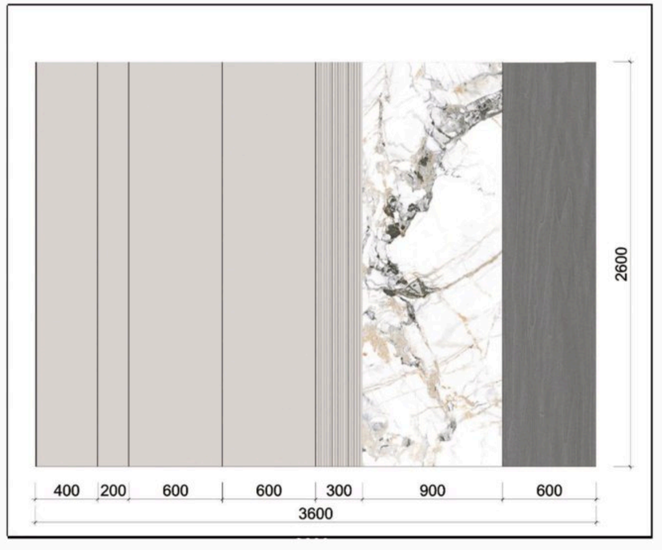


产品结构


Product structure

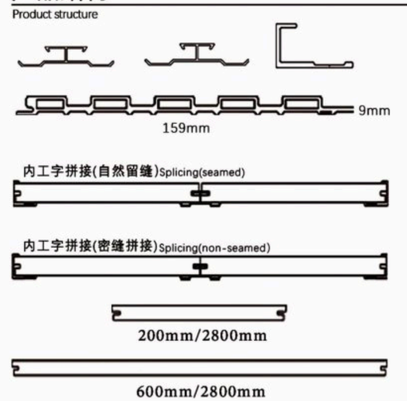







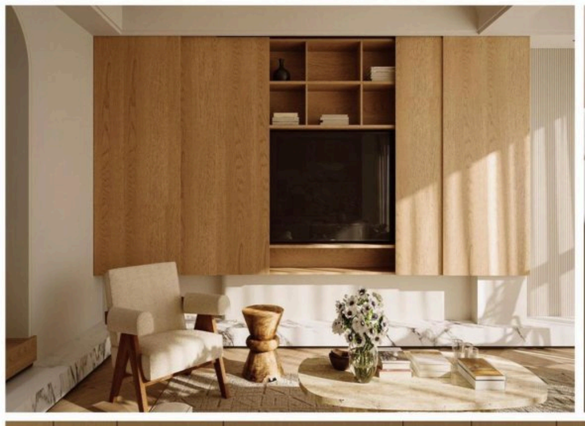

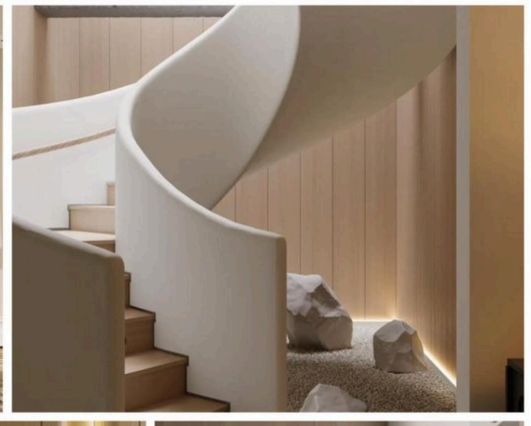

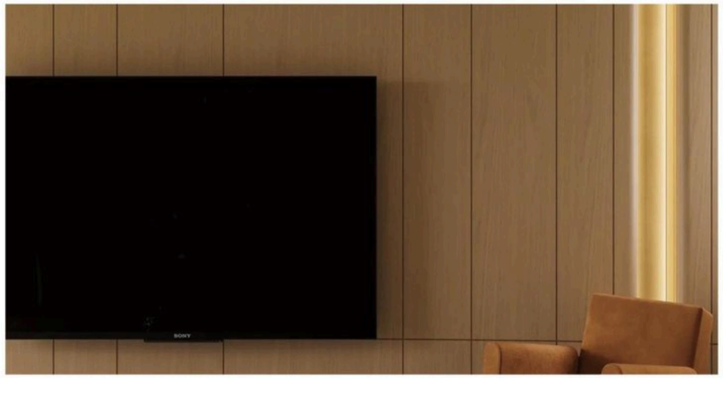

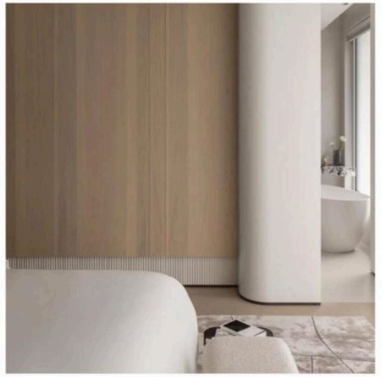

硅晶板/碳晶板安装方法
plate wall installation method

安装步骤
Installation procedure



安装前的准备以及安装的需求
Preparation before installation and requirements of the installation site

01 安装场所必须干燥并且至少安装前24小时要达到规定的温湿标准，安装后的最大湿度变化值要控制在40%—60%范围内。

The installation site must be dry and reach the specified temperature and humidity standards at least 24 hours before installation.The minimum temperature required by the installation site is 15 degrees, and the maximum humidity change value after installation should be controlled within the range of 40%-60%.

02 安装前，必须先将墙面进行清理，保持墙面干净，然后将包装箱打开以便产品达到与安装场所相一致的环境特性

Before installation, the wall must be cleaned and kept clean, then the box must be opened in order for the product to achieve environmental characteristics consistent with the place of installation.


03 测量墙体的尺寸，检测墙体的表面是否有巨大凹陷
然后根据图纸尺寸进行施工裁切板材

Measure the dimensions of the wall, detect whether there is a huge depression on the surface of the wall, and then cut the sheet according to the size of the drawing for construction

04 准备所需要安装上墙面的板材，并在板材背面打上结构胶水
静止2分钟后，人工快速上墙贴合，然后利用金属材料加枪钉进行位置固定。

Prepare the required panels to be installed on the wall and apply structural adhesive on the back of the panels, let it rest for 2 minutes, then manually fasten them on the wall and then utilize the metal material with gun nails for position fixing.



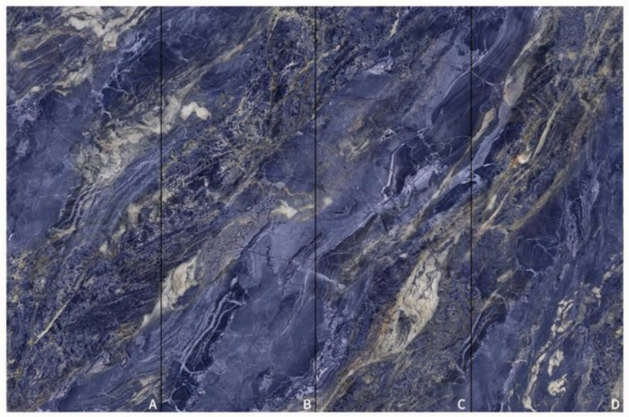


卷石B Suroshi B

防水防潮 环保E0级 B1阻燃 无辐射 可定制

高端大理石连纹系列金刚板是一种高性能的装饰材料，不仅令人惊叹地再现大理石的细致纹理，同时采用碳晶技术提升了耐磨性和抗污性，为您的家居提供持久的美观和易清理的表面。

Luxury Marble Continuous Series Diamond Panel is a high-performance decorative material,.The detailed texture of luxurious marble provides your home with long-lasting beauty and an easy-to-clean surface.

Advanced Customization

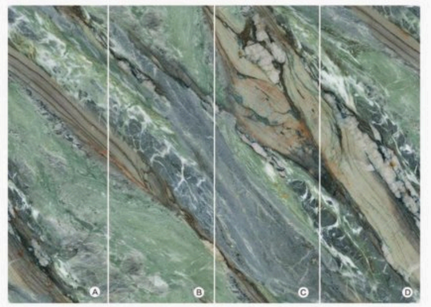



产品概述
Product Overview

产品名称
Product Name
高端大理石连纹系列
Luxury Marble Continuous Series

产品材质
Material
金刚板/碳晶板
Diamond Panel/Carbon Crystal Panel


连接工艺
Connection Process
无缝拼接
Seamless Splicing

产品规格
Product Specification
DIY定制
DIY Customized Size
宽:1100–1200mm
Width: Max1100–1200mm
高:2000–4000mm
Height: Max2000–4000mm
厚:5/8mm
Thickness: 5mm/8mm


性能
Performance
高滑面质感
High Glossy Texture
耐刮
Scratch Resistant
防油污
Anti-Fouling


LUXURY BOOK MATCH MARBLE SERIES
高端大理石连纹系列




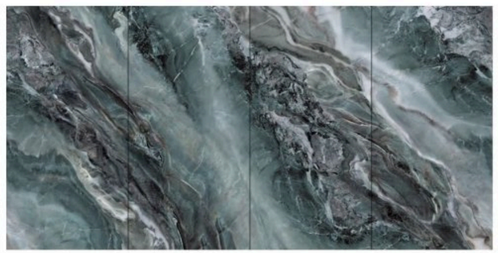




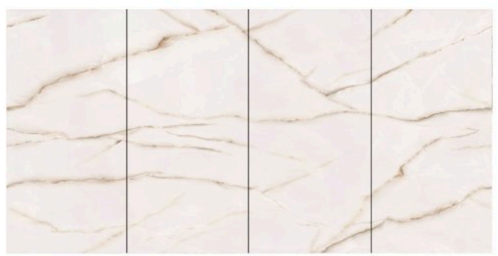



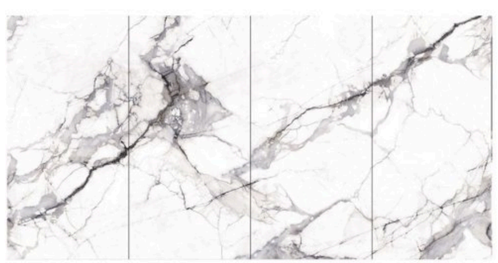






SPACE


家居视觉感受
如同挥之不去的精灵

Advanced Customization

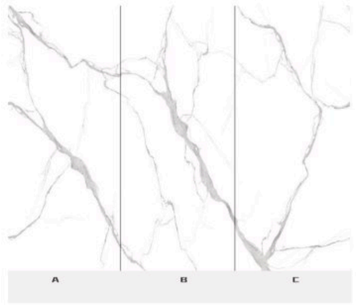







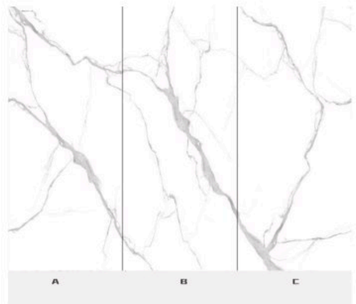




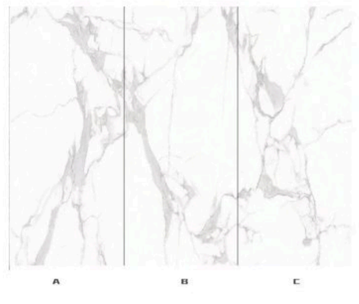





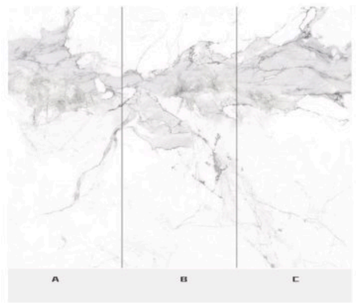






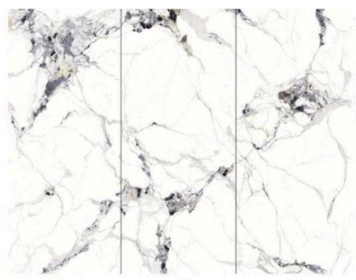





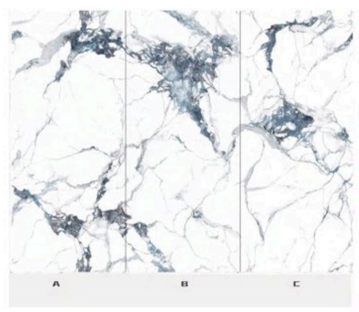





LUXURY BOOK MATCH MARBLE SERIES
高端大理石连纹系列

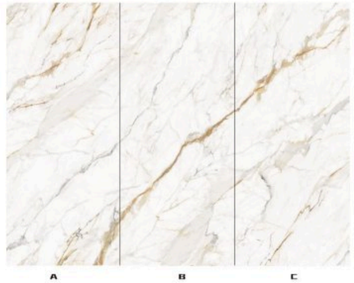

A B C



连纹16 Stripe 16

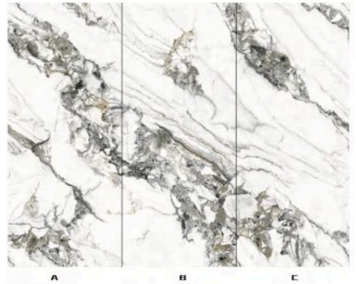

A B C


苏石9r Suroshi 9r

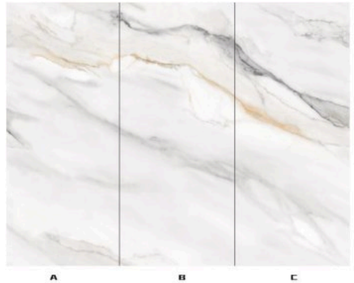

A B C


连纹21 Stripe 21

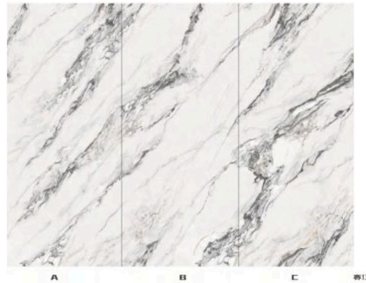
A B C



苏江南连纹 Sol Jiangnan even grain


A B C


潘那罗 Pandora


A B C


无限线12 Infinite with 12

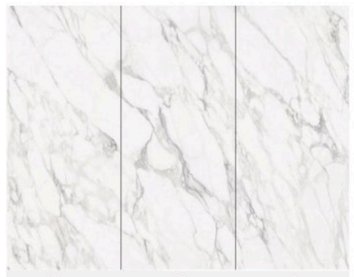

A B C


线纹51 Stripe 51



A B C


无限线23r Unlimited with 23r


Advanced Customization

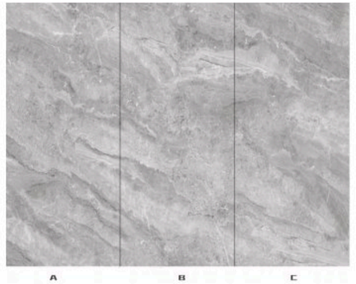

A B C



黄海石 Yellow cove stone

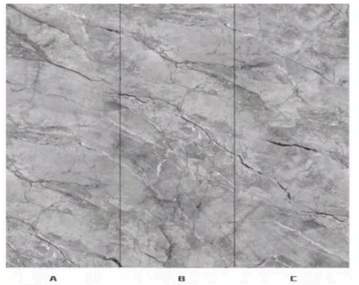
A B C



格兰森 Gronson

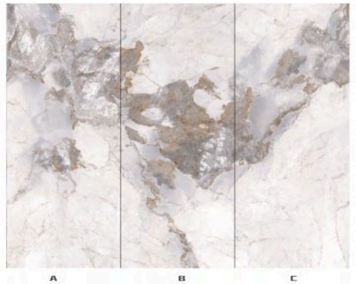

A B C


卡地亚 Cartier

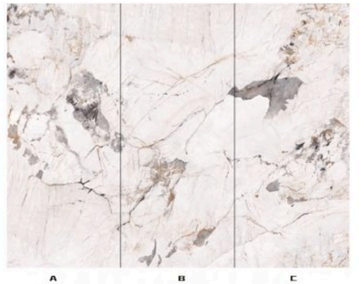

A B C



宝格丽R Bulgari R

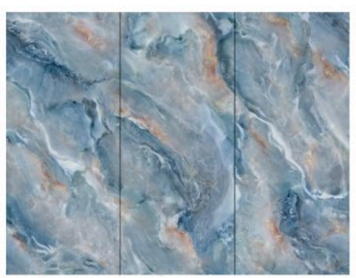
A B C


苏65 Suroshi 5



A B C


苏64Z Suroshi 4Z

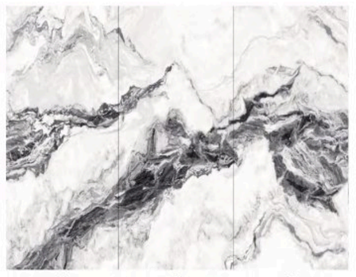
A B C



苏639 Suroshi 39


A B C



线纹23 Stripe 23




A B C




苏石7 Suroshi 7

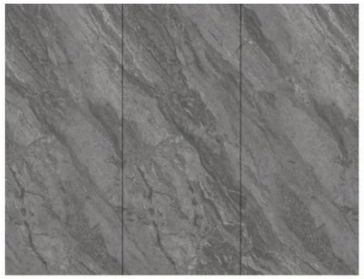


A B C



柏拉图1 Plato 1

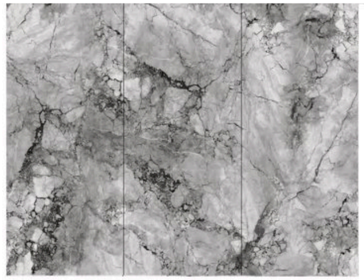

A B C



布宜诺斯1 Bulos 1




A B C



俊秀河山 Junxiu river mountain

FINELY

时尚与精致结合
体现非同一般的艺术感受

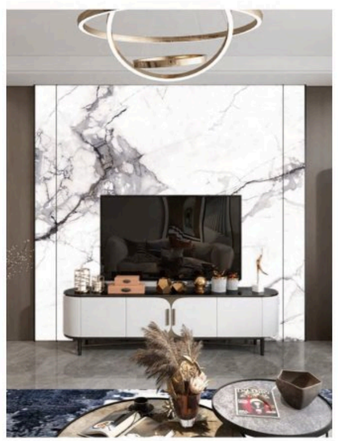




SPACE

家居视觉感受
如同挥之不去的精灵





A B C

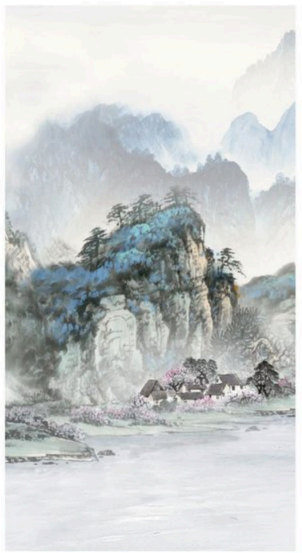

山水画 Landscape painting

高定系列
耐污抗划木纹

Luxurious custom/Stain scratch resistant wood grain

Advanced Customization



FB1001-A
木纹系列



FB1002-B
木纹系列



FB1030-A
木纹系列



FB1003-B
木纹系列



FB1004-B
木纹系列



FBH005-D
高端木纹系列



FB1005-A
木纹系列



FB1006-A
木纹系列



FB1012-B
木纹系列



FB1007-A
木纹系列



FB1008-A
木纹系列




FB1030-A
木纹系列



木纹系列/Wood grain

Advanced Customization

FB1010-A
木纹系列



FB1026-A
木纹系列



FB1031-A
木纹系列



FB1025-A
木纹系列



FB1024-A
木纹系列



FBH001-D
高端木纹系列



FB1019-A
木纹系列



FB1028-A
木纹系列



FBH006-D
高端木纹系列



FBH010-D
高端木纹系列



FB1009-A
木纹系列



FBH006-D
高端木纹系列



FB1077-A
木纹系列



FB1016-A
木纹系列



FB1017-A
木纹系列



FB1027-A
木纹系列



FBH003-D
高端木纹系列



FB1022-A
木纹系列



FB1034-A
木纹系列



FB1020-A
木纹系列



FBH004-D
高端木纹系列



FB1021-A
木纹系列



FB1015-C
木纹系列



FBH012-D
高端木纹系列



FB1023-A
木纹系列



FB1018-A
木纹系列



FB1033-A
木纹系列



FBH011-D
高端木纹系列



FB1014-C
木纹系列



FB1029-A
木纹系列




FB1013-A
木纹系列



FBH002-D
高端木纹系列



FB1032-A
木纹系列



FBH004-D
高端木纹系列





Advanced Customization

IMULATION PAINT SERIES

真漆系列

Advanced Customization

ECO-FRIENDLY PURE PAINT

纯色环保油漆

FB-H014D

FB-H024D

FB-H013D

FB-H020D

FB-H027D

FB-H023D

FB-H025D

FB-H017D

FB-H028D

FB-H019D

FB-H016D

FB-H015D

FB-H018D

颜色参照国际标准色卡RAL色卡、PANTON色卡，接受客户色卡定制。

Customized color accepted. refer to international standard RAL or PANTON color chart

布纹系列/PAPER SERIES

Advanced Customization

FB1048-A
布纹系列

FB-H065D
布纹系列

FB1056-A
布纹系列

FB-H062D
布纹系列

FB-H063D
布纹系列

FB-H060D
布纹系列

FB1055-B
布纹系列

FB1050-B
布纹系列

FB-H061D
布纹系列

FB1046-A
布纹系列

FB1054-A
布纹系列

FB1053-A
布纹系列

FB1057-A
布纹系列

FB1052-A
布纹系列

FB-H059D
布纹系列

FB1076-A
布纹系列

FBH003-D
布纹系列

FB1051-A
布纹系列

FB-H066D
布纹系列

FB1020-A
布纹系列

FB1044-B
布纹系列

FB1040-B
布纹系列


FB1047-B
布纹系列

FB1042-A
布纹系列

FB1045-A
布纹系列

FB1043-A
布纹系列

FB-H064D
布纹系列

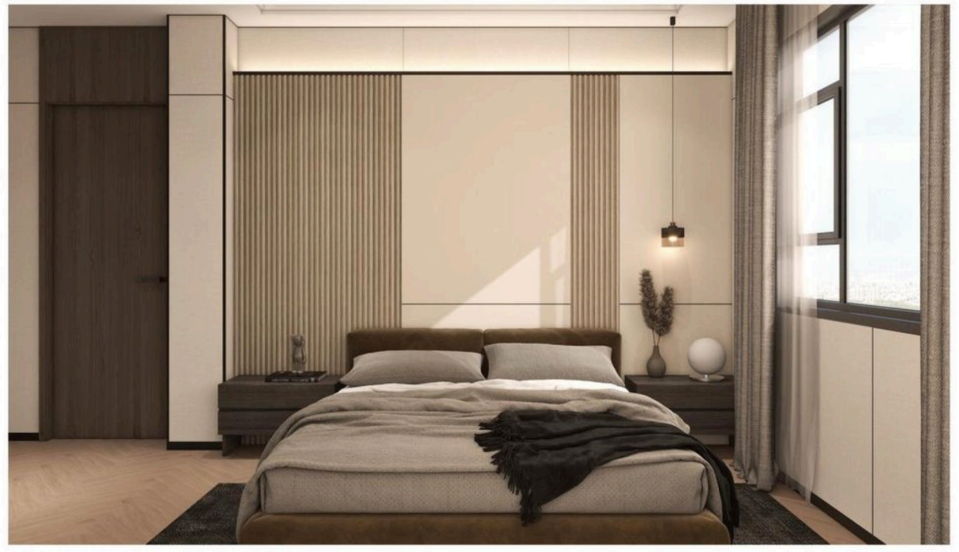



Advanced Customization

PURE SERIES
纯色系列



SKIN SENSE SERIES
肤感系列



颜色参照国际标准色卡RAL色卡、PANTON色卡，接受客户色卡定制。
Customized color accepted. refer to international standard RAL or PANTON color chart

Advanced Customization

IMULATION PAINT SERIES

金属系列



Advanced Customization

ECO-FRIENDLY PURE PAINT

金属环保油漆


FB-H043F


FB-H044F


FB-H054F


FB-H053F


FB-H049F


FB-H073E


FB-H074E



FB-H052F


FB-H047F



FB-H048F


FB-H050F


FB-H075E


FB-H077E


FB-H076E


FB-H054F



FB-H053F

颜色参照国际标准色卡RAL色卡、PANTON色卡，接受客户色卡定制。
Customized color accepted. refer to international standard RAL or PANTON color chart

高定系列
耐污抗划皮纹

Luxurious custom/Stain scratch resistant wood grain

Advanced Customization

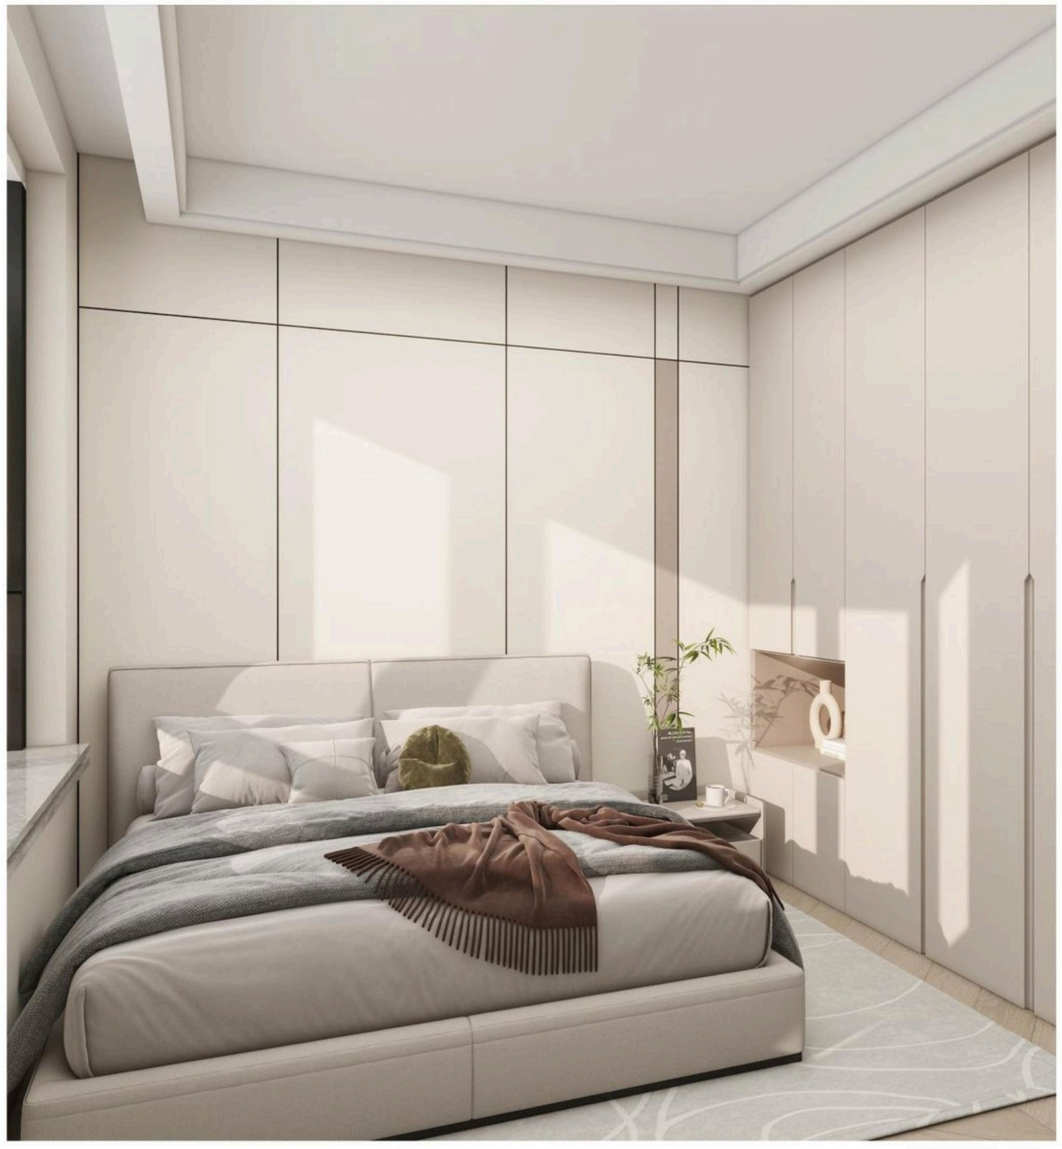

FB-H072D
皮纹系列

FB-H068D
皮纹系列

FB-H067D
皮纹系列

FB1039-C
皮纹系列

FB-H069D
皮纹系列

FB1038-A
皮纹系列

FB1035-A
皮纹系列

FB-H070D
皮纹系列

FB-H071D
皮纹系列

FB1036-B
皮纹系列

FB1037-B
皮纹系列

WPC Outdoor

WPC户外

Outdoor WPC panel, using 100% PVC high-quality rubber material

Outdoor WPC Panel Overview
户外WPC面板概述

户外WPC面板，采用100%PVC优质胶料，通过高温工艺挤压而成产品表面有抗涂SA保护层，专业的生产设备技术，全过程无采用二次回收劣质原料。全新的PVC胶料，经过专用的器材处理后高温加热发泡制作，表面经过防腐、耐磨、阻燃、防紫外线等功能加工处理。我们有不同类型结构的户外WPC面板，能按照客户需求做到各种定制我们能够提供多种户外WPC面板工装和家装材料，产品表面采用SA覆膜工艺，能够耐受高温，具有高强度防刮耐磨功能，有配套完善的线条、并且原材料把控能够批量个性定制生产，可以满足不同客户的需求。

Outdoor WPC panel, using 100% PVC high-quality rubber material, extruded through high-temperature process, the surface of the product has anti-coating SA protective layer, professional production equipment technology, the whole process without the use of secondary recycling of poor quality raw materials. Brand new PVC rubber material, after special equipment processing high temperature heating foam production, the surface of anti-corrosion, wear-resistant, flame retardant, UV protection and other functional processing. We have different types of structural outdoor WPC panels, according to customer demand to do a variety of customised, we can provide a variety of outdoor WPC panels work and home decoration materials, the product surface using the SA lamination process, able to withstand high temperatures, with high strength anti-scratch and wear-resistant function, there is a complete line of supporting and raw material control can be a batch of customised production of personality to meet the needs of different customers.



优质
High Quality

- 手感真实 Realistic feel
- 发泡均匀 Uniform foaming
- 防火性好 High fire resistance
- 安装快 Quick installation
- 有抗涂层 Anti-coating
- 使用寿命长 Long service life
- 全新胶料 New rubber material
- 密度硬度高 High density



劣质
Low Quality

- 发泡性差 Poor foaming properties
- 承重差 Poor load bearing
- 回收废料 Recycling waste
- 发泡不均匀 Uneven foaming
- 不耐高温 No high temperature
- 支撑性差 Poor support
- 易破损 Easy to break
- 使用寿命短 Short service life



WPC户外材料安装方法

WPC Outdoor Material Installation Method

安装前的准备以及安装的需求

Preparation before installation and requirements of the installation site

01 安装场所必须通过尺量测量现场平整度，并且平整度偏差不能超过3MM，然后清洁墙体表面，确保无灰尘，无油渍

The installation place must measure the site flatness by ruler, and the flatness deviation can not exceed 3MM, then clean the wall surface to ensure that there is no dust, no grease stains.

02 根据设计图纸和施工要求，进行详细而且准确的标注尺寸

According to the design drawings and construction requirements, detailed and accurate dimensioning.

03 然后将包装箱打开，然后根据设计图纸和测量墙体尺寸进行施工裁切WPC户外材料

Then open the box, then according to the design drawings and measure the size of the wall construction cutting WPC outdoor materials


04 准备所需要安装上墙面的WPC户外材料，并在板材背面打上结构胶水，静止2分钟后，人工快速上墙贴合用专用钉扣固定安装胶水溢出位置进行清理，线条收边修补缺陷后再打磨表面


Prepare the WPC outdoor materials that need to be installed on the wall, and hit the back of the sheet with structural glue, after 2 minutes of static, artificial fast on the wall to fit with a special nail fastener fixed installation, glue overflow position to clean up, line edging to repair defects and then sanding the surface.

WPC户外安装步骤


WPC outdoor Installation Procedure




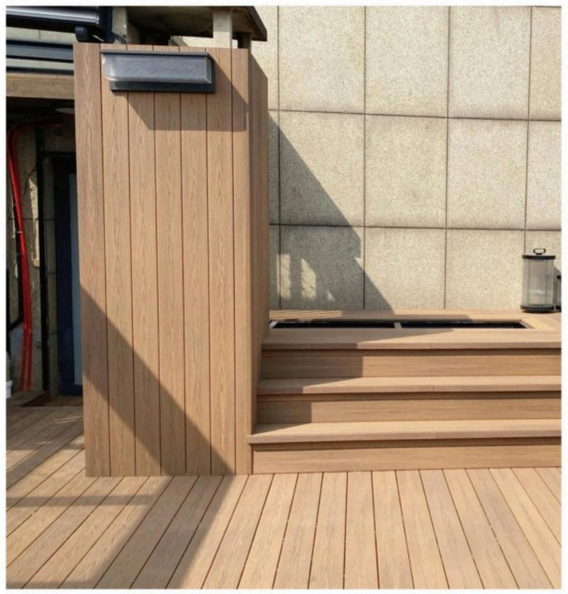

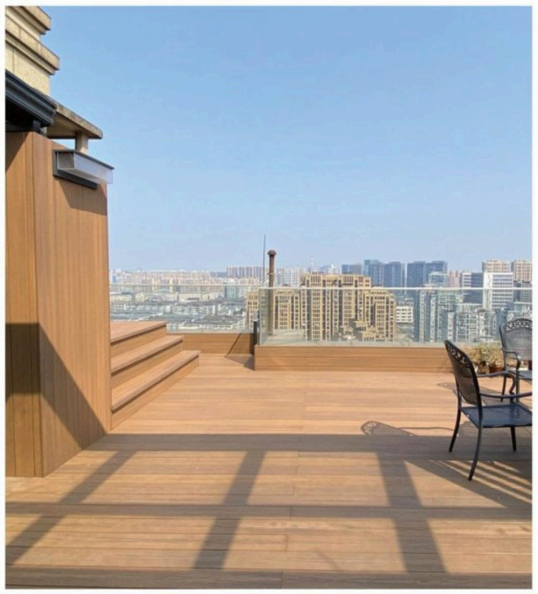



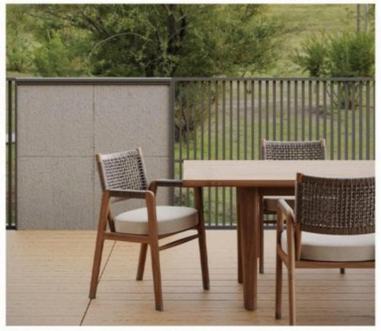


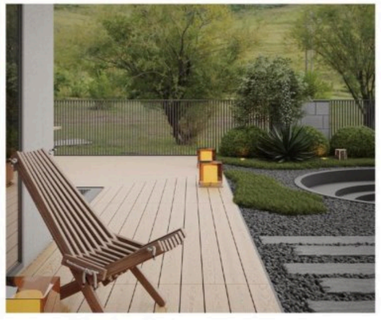

OUTDOOR WALL PANEL

WPC墙板

Advanced Customization

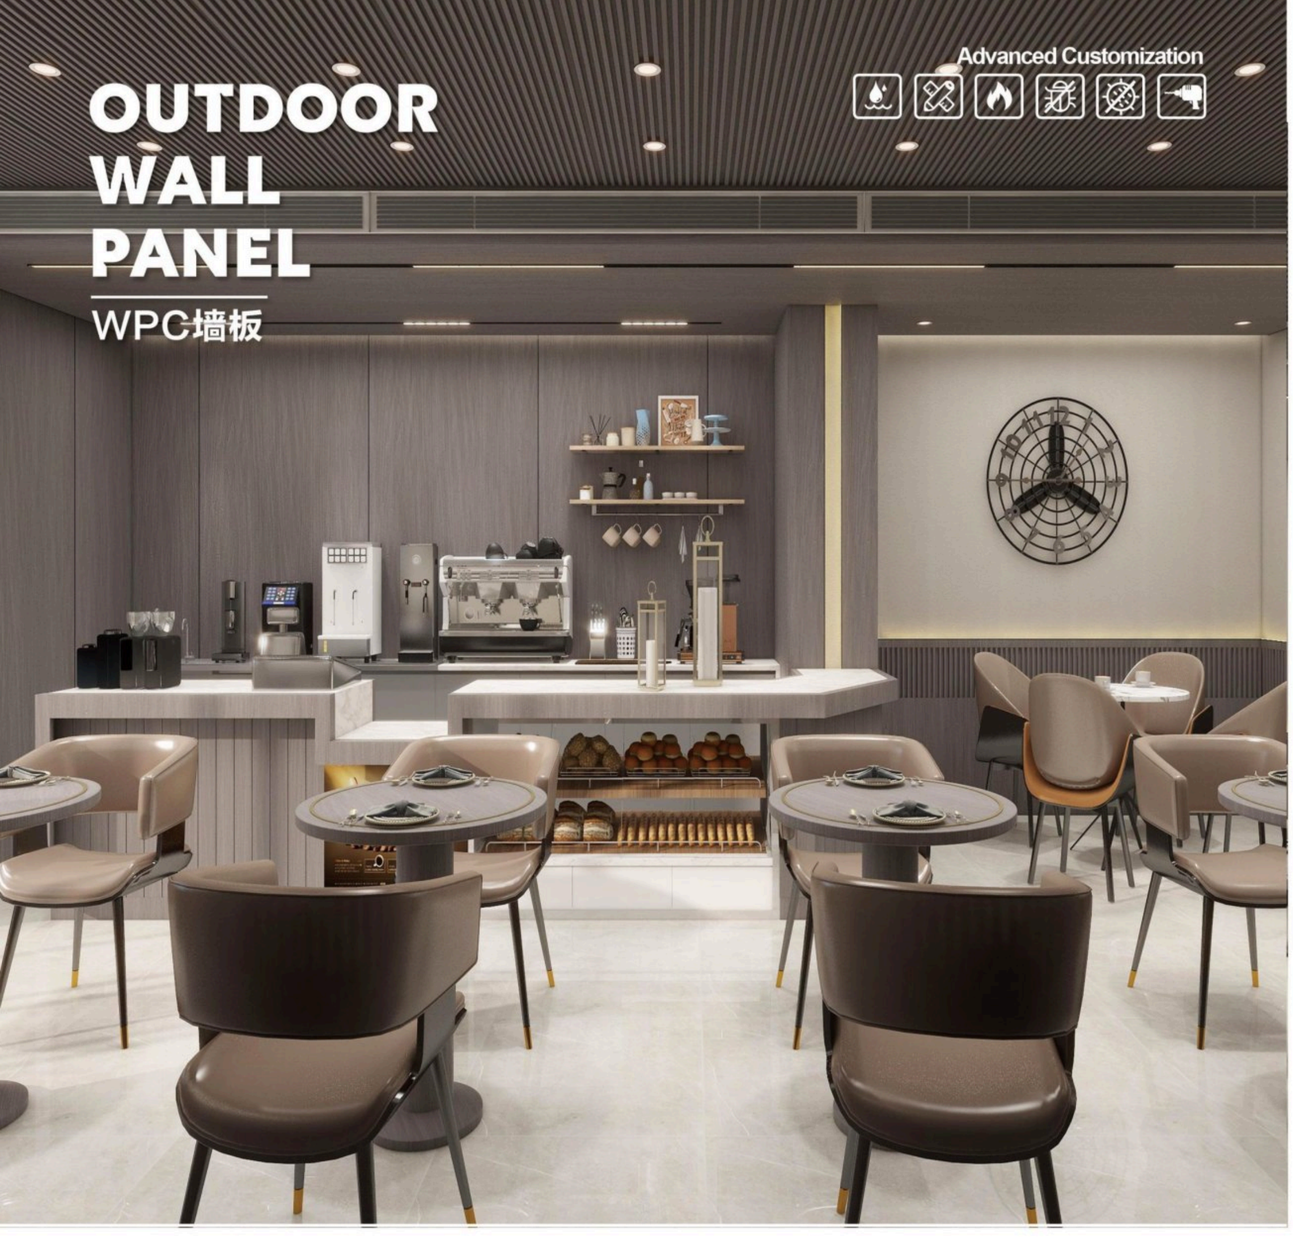




ZXL11516 Size:115mm*16mm



ZXL18428 Size:184mm*28mm

Advanced Customization



ZXL14012 Size:140mm*12mm



ZXL12012 Size:120mm*12mm



ZXL16914 Size:169mm*14mm



ZXL184 Size:184mm*28mm

Easy To Install 安装方便 | Waterproof 防水防潮 | Fire Protection 防火阻燃 | Easy To Clean 易清洁 | No Distortion 不变形 | Eco-friendly 健康环保 | Pest Control 防虫蚊

Recommended Colors 推荐颜色



Inca Deep 印加深 | Golden Silk Pomelo 金丝柚 | Golden Pomelo 黄金柚 | Thai Pomelo 泰 柚 | Teak 柚 木 | Ancient Wood 古 木 | Taxus Chinensis 红豆杉 | Rosewood 红酸枝 | Warm White 暖 白 | Black 黑 色

Common Accessories 常用配件



❶ Wall Panel Keel 墙板龙骨

❷ Wall Plate Clasp 墙板卡扣

❸ Explosive Screws 爆炸螺丝

❹ Gun Nail 枪钉

❺ Self-tapping Screw 自攻螺丝



SPC latch floor

石塑锁扣地板

A good floor is creative.

全球最严格的室内空气质量标准（美国）

欧盟CE标志

法国室内空气环境检测A+级认证

德国TUV认证

SGS国际性权威标准检验组织

国际公认的建筑产品健康认证

中国实验室国家认可文员会

ISO9001质量管理体系


ISO14001环保管理体系认证

OHSAS18001职业健康安全管理体系

国际公认的可持续发展认证

国际公认的环保产品认证

Advanced Customization

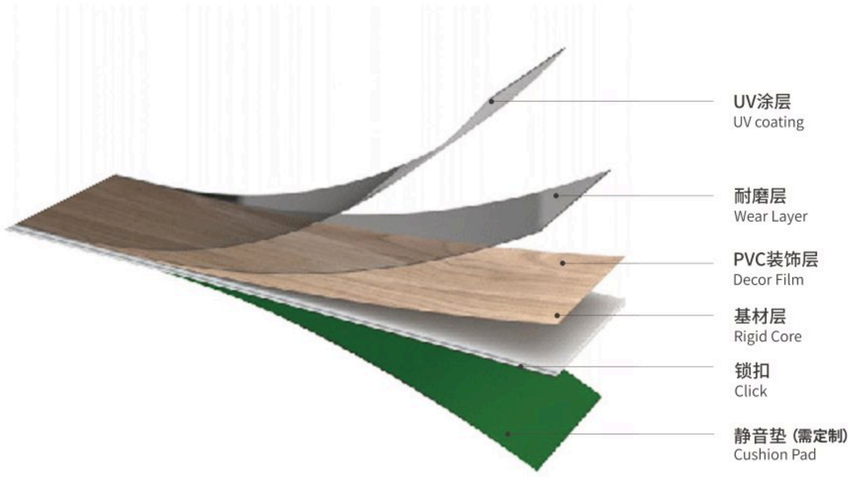



Suitable for floor heating 无醛添加

Not Combustible 防火阻燃

Silent Soundproofing 静音隔音

Suitable for floor heating 防水防滑

Suitable for floor heating 适用地暖

Super Wear Resistant 超强耐磨

FUNCTION, IN ALL ASPECTS

功能,面面俱到



吸音降噪

Sound absorption and noise reduction


全新一代石晶地板特有的表层和IXPE发泡垫层经无缝处理后，有普通地面材料无法相比的吸音效果，可充分起到吸音、隔音的功能，解决了噪音的烦恼。所以在需要安静的环境如医院病房、学校图书馆、报告厅等选用石晶地板。



导热保暖

Heat conduction and warmth preservation

品质高，材质物理性能稳定。导热性能良好，散热均匀，家装地暖使用不会膨胀变形。地板在欧美以及日韩等国家及地区，是家装地暖导热地板的首选产品。

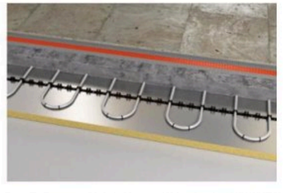


抗菌防霉

Antibacterial and anti-mildew


全新一代石晶地板的主要成分是天然石粉和PVC高分子树脂粉，和水无亲和力，更不会因为湿度大而发生霉变。地板表面经过特殊的抗菌、抗污处理，对绝大多数细菌都有较强的杀灭能力，抑制细菌繁殖的能力。



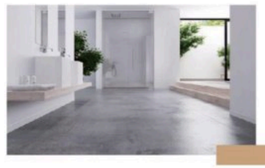

DESIGN PRESENTATION

设计展示

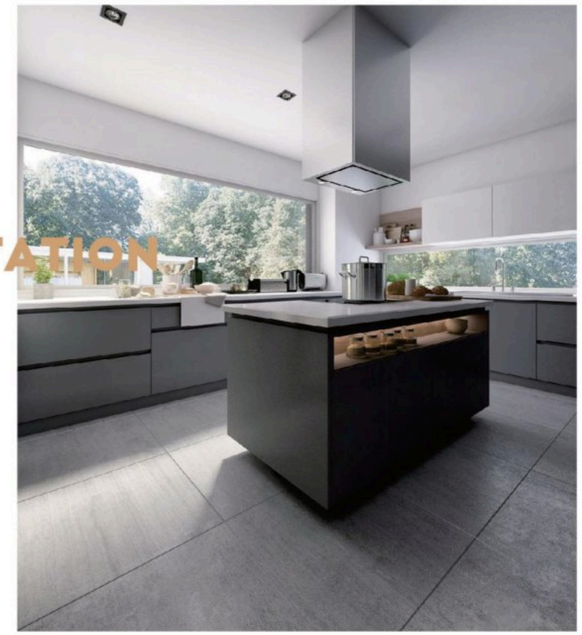



采用锁扣技术，通过凹槽和凸榫镶嵌，
以相互咬合的方式紧密连接

款式展示/Style display



注:单片尺寸为1220×181mm,常规厚度为4.0mm,5.0mm,6.0mm
更多款式欢迎咨询

Advanced Customization

SPC地板安装

SPC floor installation


①首先从墙角开始放置第一片地板，锁扣母槽朝向外侧，在地板的短边和长边放置5-8mm厚度的垫片，以保持与墙体之间所需的伸缩缝隙。



②利用插入式锁扣系统拼接短边，将短边以15-20度的倾斜角插入上一片的短边母槽内，锁扣在地板放平后自然契合。



③继续安装第一排直至最后一片。测量并标记，然后利用美工刀进行裁切、折断。利用上一片裁切部分开始拼接下一行来错开纹路。

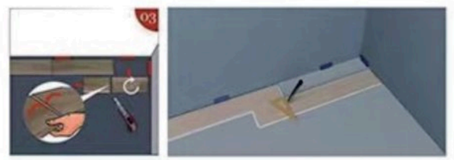

④在拼接第二排时，首先进行短边拼接。





⑤然后以15-20度的倾斜角将长边推入卡槽，锁扣在地板放平后自然契合，保持排列对齐。继续铺设剩余的地板。



⑥⑦在障碍物四周留8mm的伸缩缝。



⑧锁扣拆卸。首先拆卸地板长边，将地板长边抬起约15-20度，轻轻抽出整排地板。然后拆卸地板短边，将地板短边抬起约15-20度，轻轻抽出整片地板。

